



**Advanced Card Systems Ltd.**  
Card & Reader Technologies

# ACM1281S-C7

## Serial Contactless Reader Module with SAM Slot



Technical Specifications V1.04



## Table of Contents

1.0.	Introduction .....	3
2.0.	Features .....	4
3.0.	Typical Applications .....	5
4.0.	Technical Specifications .....	6



## 1.0. Introduction



The ACM1281S-C7 Serial Contactless Reader Module with SAM Slot was designed based on the 13.56 MHz technology. It supports ISO 14443 Parts 1-4 Type A and B cards, as well as MIFARE Classic® series cards. It has a card reading distance of up to 50 mm (depending on tag type).

The ACM1281S-C7 is a Plug and Play device that does not require any driver installation. It is specifically designed for fast and easy integration to embedded systems. It also has an ISO 7816-compliant built-in SAM (Secure Access Module) slot, which can be used together with a SAM card for high-level security in contactless transactions.

The ACM1281S-C7 has an integrated (on-board) antenna, comes with an optional serial cable, and has additional features like USB firmware upgradeability and extended APDU support. Lastly, the ACM1281S-C7 makes use of high-speed communication for contactless cards at a maximum of 848 Kbps, which makes it suitable for highly demanding applications such as vending machine payment systems, kiosks, gaming machines, and other integrated systems which have different serial ports.



## 2.0. Features


- Serial RS-232 Interface: Baud Rate = 9.6 Kbps (default), 19.2 Kbps, 38.4 Kbps, 57.6 Kbps, 115.2 Kbps, 230.4 Kbps
- USB interface for power supply
- CCID-like frame format
- Smart Card Reader:
  - Contactless Interface:
    - Read/Write speed of up to 848 Kbps
    - Built-in antenna for contactless tag access, with card reading distance of up to 50 mm (depending on tag type)
    - Supports ISO 14443 Part 4 Type A and B cards and MIFARE Classic series
    - Built-in anti-collision feature (only one tag is accessed at any time)
    - Supports extended APDU (Max. 64 KB)
  - SAM Interface:
    - One SAM slot
    - Supports ISO 7816-compliant Class A SAM cards
- Built-in Peripherals:
  - Two user-controllable LEDs
  - User-controllable buzzer
- USB Firmware Upgradeability
- Compliant with the following standards:
  - ISO 14443
  - ISO 7816
  - PC/SC
  - CE
  - FCC
  - RoHS
  - REACH



### **3.0. Typical Applications**

- e-Government
- e-Banking and e-Payment
- e-Healthcare
- Transportation
- Network Security
- Access Control
- Loyalty Program

## 4.0. Technical Specifications

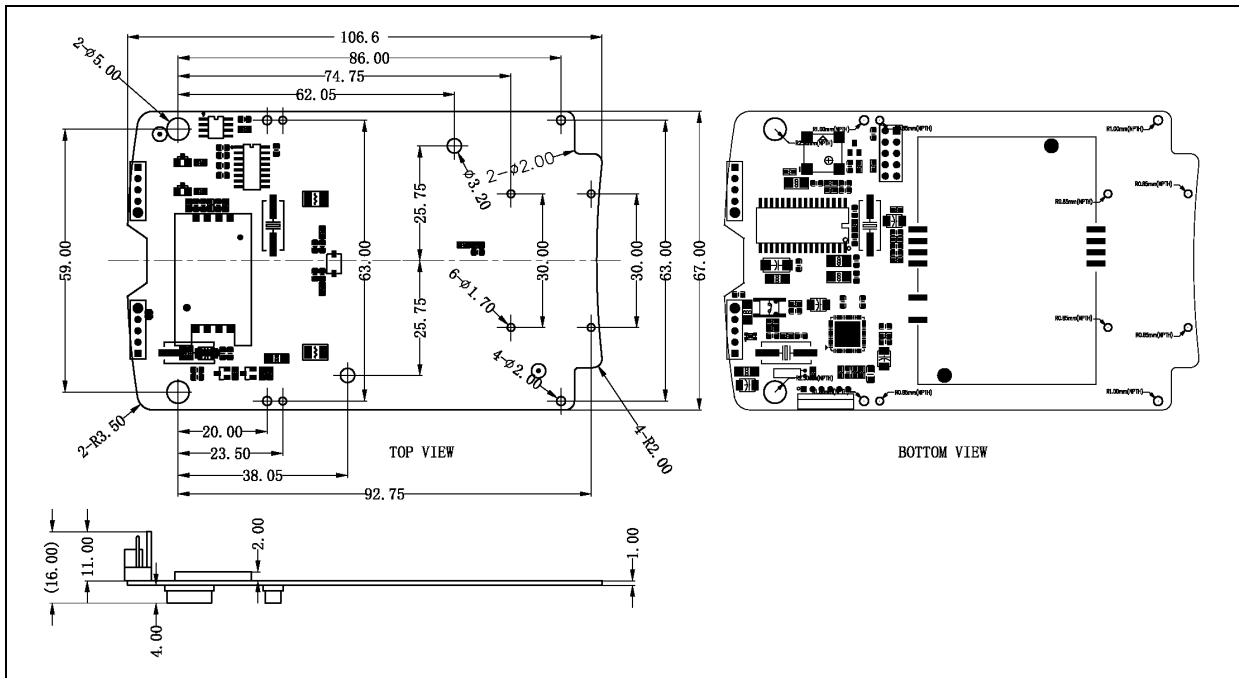

### Physical Characteristics

Dimensions ..... 106.6 mm (L) × 67.0 mm (W) × 16.0 mm (H)  
Weight ..... 20.8 g

### Serial Host Interface

Protocol ..... RS-232  
Connector Type ..... DB-9 connector  
Power Source ..... From USB port  
Speed ..... 9.6 Kbps (default), 19.2 Kbps, 38.4 Kbps, 57.6 Kbps, 115.2 Kbps, 230.4 Kbps  
Supply Voltage ..... 5 V  
Supply Current ..... Max. 200 mA  
Cable Length ..... 1.5 m, Detachable (optional)

### Contactless Smart Card Interface

Standard ..... ISO 14443 Type A & B Parts 1-4  
Protocol ..... ISO 14443 T=CL for ISO 14443-4-compliant cards  
..... T=CL Emulation for MIFARE cards  
Operating Frequency ..... 13.56 MHz  
Operating Distance ..... Up to 50 mm (depending on card type)  
Smart Card Read/Write Speed ..... 106 Kbps, 212 Kbps, 424 Kbps, 848 Kbps  
Antenna Size ..... 65 mm × 60 mm

### SAM Card Interface

Number of Slots ..... 1 Standard SIM-sized Card Slot  
Standard ..... ISO 7816, Class A (5 V)  
Protocol ..... T=0; T=1  
Smart Card Read/Write Speed ..... 9.6 Kbps – 344 Kbps  
Card Connector Type ..... SAM Slot 0: Contact

### Built-in Peripherals

LED ..... 2 single-color: Red and Green  
Buzzer ..... Monotone

### Other Feature

Firmware Upgrade ..... Supported

### Operating Conditions

Temperature ..... 0 °C – 60 °C  
Humidity ..... Max. 90% (non-condensing)  
MTBF ..... 500,000 hrs

### Certifications/Compliance

EN 60950/EIC 60950, ISO 14443, ISO 7816 (SAM Slot), CE, FCC, RoHS, REACH



**Device Driver Operating System Support**

Windows® XP, Windows® Vista™, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10,  
Windows® Server 2003, Windows® Server 2008, Windows® Server 2008 R2, Windows® Server 2012,  
Windows® Server 2012 R2, Windows® Server 2016  
Linux®



Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.  
Microsoft, Windows and Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or other countries.  
MIFARE and MIFARE Classic are registered trademarks of NXP B.V. and are used under license.